
► GAS MIXER



BM



BM-2M

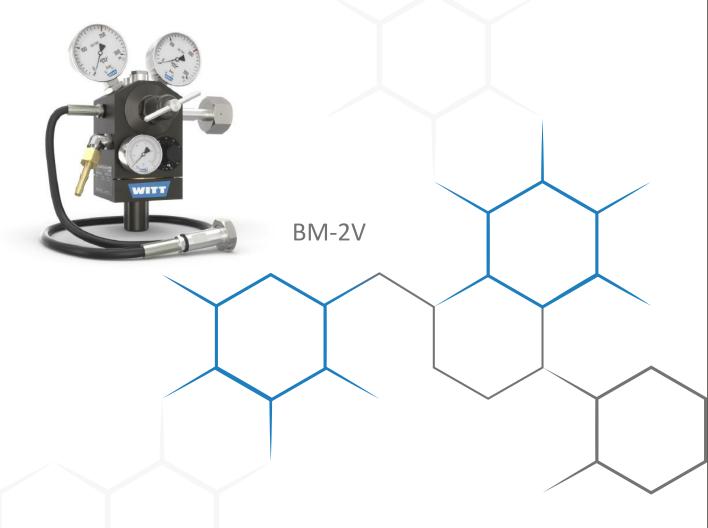

Made in Germany

Product of









BM-2M BM-2V

Gas mixing systems for 2 defined gases, designed for a variety of industrial applications, for direct cylinder connection (high pressure).

BM-2M capacity range up to approx. 111 Nl/min. BM-2V capacity range up to approx. 142 Nl/min. For the exact pressure and flow capacity ratios, please see the technical data overleaf.

Benefits

- no more components required e.g. pressure control for low costs
- compact design
- easy to install
- protection of downstream equipment using 2 integrated blow-off valves to protect against dangerous overpressures

Easy operation

- proportional mixing valve with a control knob and %-scale provides infinitely variable mixture settings
- infinitely variable flow setting with scaled adjustment knob (BM-2M)
- a pressure regulator provides infinitely variable outlet pressures (BM-2V)

High process reliability

- independent of pressure fluctuations in the gas supply
- independent of withdrawal fluctuations (in permitted range)

Other models, options and accessories available upon request.

Please identify the individual gases at the time of enquiring!





Type BM-2M, BM-2V

Gases CO₂/Ar, CO₂/N₂, He/Ar, He/N₂, N₂/Ar

not for O₂ and flammable gases!

Mixing range 0 - 25% or 0 - 100%

Pressure settingssee tablesInlet pressuremin. 3 bar

max. 200 or 300 bar (depending on version)

outlet pressuremax. 8 barOpening pressure of blow-off valvesmax. 12 bar

Mixture output (air) see tables

min. mixture output = 1/5 of the max. mixture output

Setting accuracy $\pm 1\%$ abs. (scale 0 - 25%), $\pm 2\%$ abs. (scale 0 - 100%)

scale 0 – 25% 1% division

scale 0 – 100% 5% division

Mixing precision 2M better than ±1% abs. 2V better than ±3% abs.

till min. mixture output = 1/5 of the max. mixture output

Gas connections

Scale division

inlets cylinder connection DIN 477

outlet G 1/4 EN 560

Housingaluminium, coatedWeightapprox. 3.5 kg

Dimensions (HxWxD)

2M approx. 230 x 156 x 130 mm (9.1 x 6.1 x 5.1 inches)

(without connections)

2V approx. 230 x 156 x 130 mm (9.1 x 6.1 x 5.7 inches)

(without connections)

Approvals Company certified according to ISO 9001 and ISO 22000

for food-grade gases according to:
- Regulation (EC) No 1935/2004

Flow BM-2M (in NI/min) in relation to air											
	outlet pressure in barg										
		1	2	3	4	5	6	7	8		
	3	15	-	-	-	-	-	-	-		
	4	30	19	-	-	-	-	-	-		
min. inlet pressure in barg (max.300 bar)	5	42	36	21	-	-	-	-	-		
	6	52	49	42	25	-	-	-	-		
	7	62	62	56	46	27	-	-	-		
	8	72	72	69	63	52	30	-	-		
	9	81	82	82	78	70	57	31	-		
	10	91	91	91	89	85	76	59	32		
	11	100	100	100	100	98	91	79	63		
	12	109	109	109	110	111	105	97	85		

Flow BM-2V (in NI/min) in relation to air										
					outlet pressure in barg					
		1	2	3	4	5	6	7	8	
	3	23	-	-	-	-	-	-	-	
	4	44	30	-	-	-	-	-	-	
min.	5	60	53	35	-	-	-	-	-	
inlet pressure	6	74	72	63	37	-	-	-	-	
in barg	7	87	86	81	68	38	-	-	-	
(max.300 bar)	8	100	101	100	90	74	42	-	-	
	9	115	116	115	109	99	76	43	-	
	10	130	130	130	127	119	102	82	44	
	11	142	142	137	134	128	120	103	83	




Middle East

Asia Pacific

Regus Nassima Tower,4th&5th Floor Sheikh Zayed Road, Trade Centre DistrictDubai, UAE 124303

Phone: +971 4311 6197



Level 16, The Pavilion Tower, Jalan Raja Chulan, 50200, Kuala Lumpur, Malaysia

Phone: +603 2182 9754-5 Fax: +603-2182 9797

Europe

Florianstr. 15-21, 44139 Dortmund, Germany

Tel: +49 2302 663 4646 Int'l: +1(213) 457 - 3147



Gas Control Equipment

- Gas Mixing Systems
- Gas Metering Systems
- Gas Analysers
- Gas Pressure Vessels
- Engineering Of Customised Systems



Gas Safety Equipment

- Flashback Arrestors
- Non-return Valves
- Quick Couplings
- Safety Valves
- Stainless Steel Devices
- Gas Filters
- Pressure Regulators
- Lance Holders
- Ball Valves
- Automatic Hose Reels
- Test Equipment
- Accessories
- Customised Safety Devices

www.vivangas.com

