

► Package Leak Detectors

LEAK-MASTER® EASY



Made in Germany

Product of



Leak detection system for packages with bubble test.

LEAK-MASTER® EASY features the detection even of the smallest leaks.

After the package is placed into the test chamber filled with water, the head space above the water level is evacuated. This is done with the help of a compressed air operated Venturi nozzle (optionally also with electric vacuum pump). Thus, the package immersed in the water inflates, allowing any leaks and their location to be identified by a stream of bubbles.

Benefits

- economic and uncomplicated
- visual inspection allows localization of the leak
- for all flexible and rigid kind of packs (food-, pharmaceutical-, industrial- and other packages)
- short testing period (< 30 sec.)
- easy-to-use intuitive system – no special skills required
- easy installation and start-up
- no trace gas required in package
- can also be used for altitude simulation
- optionally also for vacuum packaging, set order no. 956992700 (-> p. 6)
- no calibration required
- various chamber sizes available
- a vacuum relief valve protects the device against deep vacuum (-> p. 6)
- low maintenance
- durability and easy to clean by acrylic housing
- standard with compressed air driven Venturi nozzle (without electrical connections)
- optionally with electrical vacuum pump (-> p. 3)










Type	LEAK-MASTER® EASY
Testing principle	visual
Calibration	not required
Vacuum	max. 200 mbar abs. (approx. -800 mbar to ambient pressure), adjustable; special version till 100 mbar abs.
Vacuum generation	compressed air powered venturi injector option: electrical vacuum pump
Compressed air pressure	min. 6 bar, max. 8 bar
Connection	G 1/4
Accessories (incl.)	hose connection OD 8 mm hose connection OD 12 mm adapter G 1/4 M to 1/4" NPT
Housing	Acryl Plexiglas® - especially robust and special refined against turn yellow
Approvals	Company certified according to ISO 9001 and ISO 22000 for food-grade gases according to: - Regulation (EC) No 1935/2004

Our manyfold accessories:

- Control unit PLUS: portable controller with various predefined measurement programmes, also for documentation of your measuring results (-> p. 4)
- Vacuum testing set: for testing vacuum packaged products and products with low gas volumes (-> p. 6)
- AD100: calibrated pressure gauge with DKD/ DAkkS-certificate (-> p. 6)
- Vacuum holding valve: blocks the chamber after generation of vacuum. Perfect for longer test periods without permanent use of compressed air (-> p. 6)
- supplementary set: for testing according ASTM F2096 (Bubble Test) (-> p. 6)

Find more details of accessories on the following pages.

Models		inner chamber size approx. in [mm] (inches) (HxWxD)	overall dimension approx. in [mm] (inches) (HxWxD)	Weight approx. in [kg] (lb)
	EASY 0.5	115 x 305 x 195 (4.5 x 12.0 x 7.7)	485 x 440 x 300 (19.1 x 17.3 x 11.8)	15.5 (34)
	EASY 1	165 x 305 x 195 (6.5 x 12.0 x 7.7)	535 x 440 x 300 (21.1 x 17.3 x 11.8)	17 (37)
	EASY 1.5	145 x 505 x 310 (5.7 x 19.9 x 12.2)	520 x 650 x 420 (20.5 x 25.6 x 16.5)	31,5 (69)
	EASY 2	205 x 505 x 310 (8.1 x 19.9 x 12.2)	580 x 650 x 420 (22.8 x 25.6 x 16.5)	35 (76)
	EASY 3	275 x 525 x 360 (10.8 x 20.7 x 14.2)	660 x 705 x 485 (26.0 x 27.8 x 19.1)	55 (121)
	EASY 4	320 x 625 x 500 (12.6 x 24.6 x 19.7)	900 x 840 x 630 (35.4 x 33.1 x 24.8)	108 (238)
	EASY 5	340 x 760 x 500 (13.4 x 29.9 x 19.7)	920 x 970 x 630 (36.2 x 38.2 x 24.8)	120 (265)

The LEAK-MASTER® EASY Leak Detectors can be used to perform a variety of ASTM test methods for detecting leaks and seal integrity.

ASTM D3078	Standard Test Method for Determination of Leaks in Flexible Packaging by Bubble Emission
ASTM D4169	Standard Practice for Performance Testing of Shipping Containers and Systems
ASTM D4991	Standard Test Method for Leakage Testing of Empty Rigid Containers by Vacuum Method
ASTM D5094	Standard Test Methods for Gross Leakage of Liquids from Containers with Threaded or Lug-Style Closures
ASTM F2096	Standard Test Method for Detecting Gross Leaks in Packaging by Internal Pressurization (Bubble Test) – using our optional supplementary set (-> p. 7)

Version with electric vacuum pump

All LEAK-MASTER® EASY models can also be operated with an electric vacuum pump - as an alternative to operation with compressed air.

You only need a power socket for this variant. All other functions are identical to the standard compressed air version. However, the vacuum pump cannot be retrofitted.

When ordering your EASY, you must therefore specify which vacuum method you wish to work with.

Diaphragm	HNBR / Stainless steel	
Max. operating pressure	0.5 bar rel.	
Permissible ambient temperature	+15 °C ... +50 °C, intermittent +70 °C	
Permissible media temperature	+5 °C ... +70 °C, intermittent +100 °C	
Weight	5.2 kg	
Dimensions pump housing	approx. 240 x 184 x 472 mm (9.45 x 7.24 x 18.58 inches) (without connections)	
Voltage	100–120 V	200–240 V
Motor	Capacitor motor	
Protection class motor	IP 00	
Frequency	50 Hz	
Power P₁	190 W	
I_{MAX}	2.10 A	1.20 A

Controller for leak detector LEAK-MASTER® EASY. In combination with LEAK-MASTER® EASY features non-destructive detection of the smallest leaks without the need of costly helium.

Pre-defined measurement programmes, an altitude simulation as well as an user independently quick and continuously working mode characterise this device.



Easily connected to your LEAK-MASTER® EASY.

A flexible controller to guarantee quality and productivity of production processes.

Benefits


- minimal response time
- quick product change
- no calibration required
- simple to operate via touch-screen
- easy installation and start-up
- permanent monitoring of set limit values
- operator friendly – data and process parameter entry and administration by means of integrated keyboard or remote personal computer (e.g. MS-Excel®)
- perfect documentation by complete user- and product data as well as error logs
- remote transmission of results via Ethernet
- Ethernet connection for network integration
- measured data storage
- administration of product names
- user management for measurement personalization
- individual configurable error codes with identification from type and location of leak
- ideal for altitude simulation testing

- for retrofitting your existing LEAK-MASTER® EASY
- hygienic and easy to clean splash-proof stainless steel cabinet / housing

Options

- Barcode Reader for simple and quick user/product selection with IP-protection

Other models, options and accessories available on request.

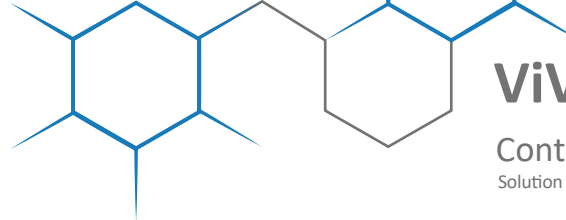

Type	Control Unit PLUS for LEAK-MASTER® EASY
Vacuum	max. 800 mbar
Temperature (gas/environment)	0 °C up to +40 °C
Interfaces	Ethernet (optional WLAN) RS 232 with ASCII-output of date, time, measured value RJ45 Ethernet FTP-Server for profiles, product and user data, software Update analog output 4-20 mA or 0-10 V
Housing	stainless steel, IP 43
Weight	approx. 8 kg
Dimensions (HxWxD) with carry handle	approx. 110 x 300 x 260 mm
Voltage	100 – 240 V AC; 50 – 60 Hz
Power consumption	230 V AC / 0.12 A
Approvals	Company certified according to ISO 9001 and ISO 22000 CE marked according to: - EMC 2014/30/EU - Low Voltage Directive 2014/35/EU for food-grade gases according to: - Regulation (EC) No 1935/2004

Vacuum set

Adapter set for testing vacuum packaged products and products with low gas volumes
Easy installation and simple handling.

**Vacuum holding valve**

With this option the chamber can be blocked after generation of vacuum. Perfect for longer test periods without permanent use of compressed air.

Calibrated pressure gauge AD100

The calibrated pressure gauge AD100 with DKD/DAkkScertificate gives more security to the customer at the daily use of LEAK-MASTER® EASY.

**Barcode-Reader**

for selection of product names and users via barcode for the electronic control unit PLUS.

Fast and save detection of all product- and user data, for manifold barcode-types, protection class IP 65.

Ideal for process optimization and optimal quality testing.

Supplementary set

for Standard Test Method according ASTM F2096, for Detecting Gross Leaks in Packaging by Internal Pressurization (Bubble Test) for Standard Test Method according ASTM F2096, for Detecting Gross Leaks in Packaging by Internal Pressurization (Bubble Test).



Middle East

Regus Nassima Tower, 4th & 5th Floor Sheikh Zayed
Road, Trade Centre District Dubai, UAE 124303

Phone: +971 4311 6197



Gas Control Equipment

- Gas Mixing Systems
- Gas Metering Systems
- Gas Analysers
- Gas Pressure Vessels
- Engineering Of Customised Systems

Asia Pacific

Level 16, The Pavilion Tower, Jalan Raja Chulan,
50200, Kuala Lumpur, Malaysia

Phone: +603 2182 9754-5

Fax: +603-2182 9797



Gas Safety Equipment

- Flashback Arrestors
- Non-return Valves
- Quick Couplings
- Safety Valves
- Stainless Steel Devices
- Gas Filters
- Pressure Regulators
- Lance Holders
- Ball Valves
- Automatic Hose Reels
- Test Equipment
- Accessories
- Customised Safety Devices

Europe

Florianstr. 15-21, 44139 Dortmund, Germany

Int'l: +1(213) 457 - 3147

Tel: +49 2302 663 4646

Tel: +49 231 292 96 5056



M.A.P Equipment

- Gas Mixing Systems
- Gas Analyzers
- Leak Detection Systems
- Modified Atmosphere Packaging Solution

letstalk@vivangas.com

www.vivangas.com